


SPECIFICATION

Quality		: CLOUD
Construction		: Scroll loop pile
Dye method		: Solution dyed
Gauge		: Tufted 1/10"
No. of tufts	ISO 1763	: ± 236400/m ²
Pile fibre		: 100% Nylon (PA 6)
Pile weight	ISO 8543	: 650 gr/m ² ± 5%
Pile height	ISO 1766	: 3.5 mm ± 5%
Primary backing		: Non-Woven
Tile backing		: Polyflex
Total thickness	ISO 1765	: 6,2 mm ± 5%
Total weight	ISO 8543	: 4200 gr/m ² ± 7,5%
Tile size		: 50 x 50 cm (± 19.7" x 19.7")
Tiles per box		: 20



PERFORMANCE

Use classification	method en 1307	: 33
Castor chair test	EN 985 / EN ISO 4918	: intensive use
Abrasion	EN ISO 12951	: pass
Vettermann test	ISO 10361: 2015 / EN ISO 10833: 2019	: pass
Thermal resistance	EN 12664	: R10 = 0,0726 m ² K/W
Thermal resistance	EN 12664	: R23 = 0,0695 m ² K/W
Dimensional stability	EN 986	: pass
Luxery/Comfort	EN 1307	: LC1
Anti-slip property	EN 16165 method B	: R13
Impact sound insulation	EN ISO 10140	: ΔL _w = 23 Db
Sound Absorption	EN ISO 354	: α _w = 0.15 (H)

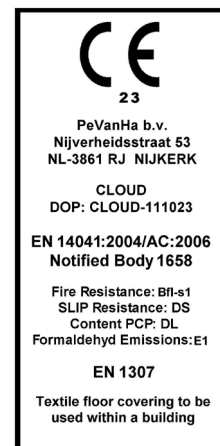

ELECTROSTATIC PROPERTIES

Walk on test	ISO 6356	: - 0,8 kV
Horizontal electrical resistance	ISO 10965	: 8,6 x 10 ¹² Ω
Vertical electrical resistance	ISO 10965	: 2,7 x 10 ¹¹ Ω
Static loading		: anti-static



FLAME PROPERTIES

Reaction to fire	EN ISO 11925-2 EN ISO 9239-1	: B _{fl} -s1
------------------	---------------------------------	-----------------------



COLOUR FASTNESS PROPERTIES

Light	EN ISO 105 B02	: 8
Rubbing, dry	EN ISO 105 X12	: 5
Rubbing, wet	ISO 105 X12	: 5
Water, change in colour	EN ISO 105-E01	: 4



GENERAL

Recommended maintenance:
Pile direction:

Best results are obtained when cleaned with a dry shampoo method.
Directional arrows are printed on the back of each tile.
Best results are obtained when laid quarter turn or brick.

Laying instructions:

Tiles require no underlay, nailing, gluing or sewing and may be laid loose on a flat, dry, non-slippery floor. When tiles are laid on parquet, vinyl or in open areas larger than 30 m² it is advisable to use double sided adhesive tape on every 8th row or a tackifier.

COLOURS

9677
9655
9675
9665
9676

9678
9685
9675
9625
9672

9673
9633
9675
9622
9671