


**GRANORTE**<sup>®</sup>  
delivering nature



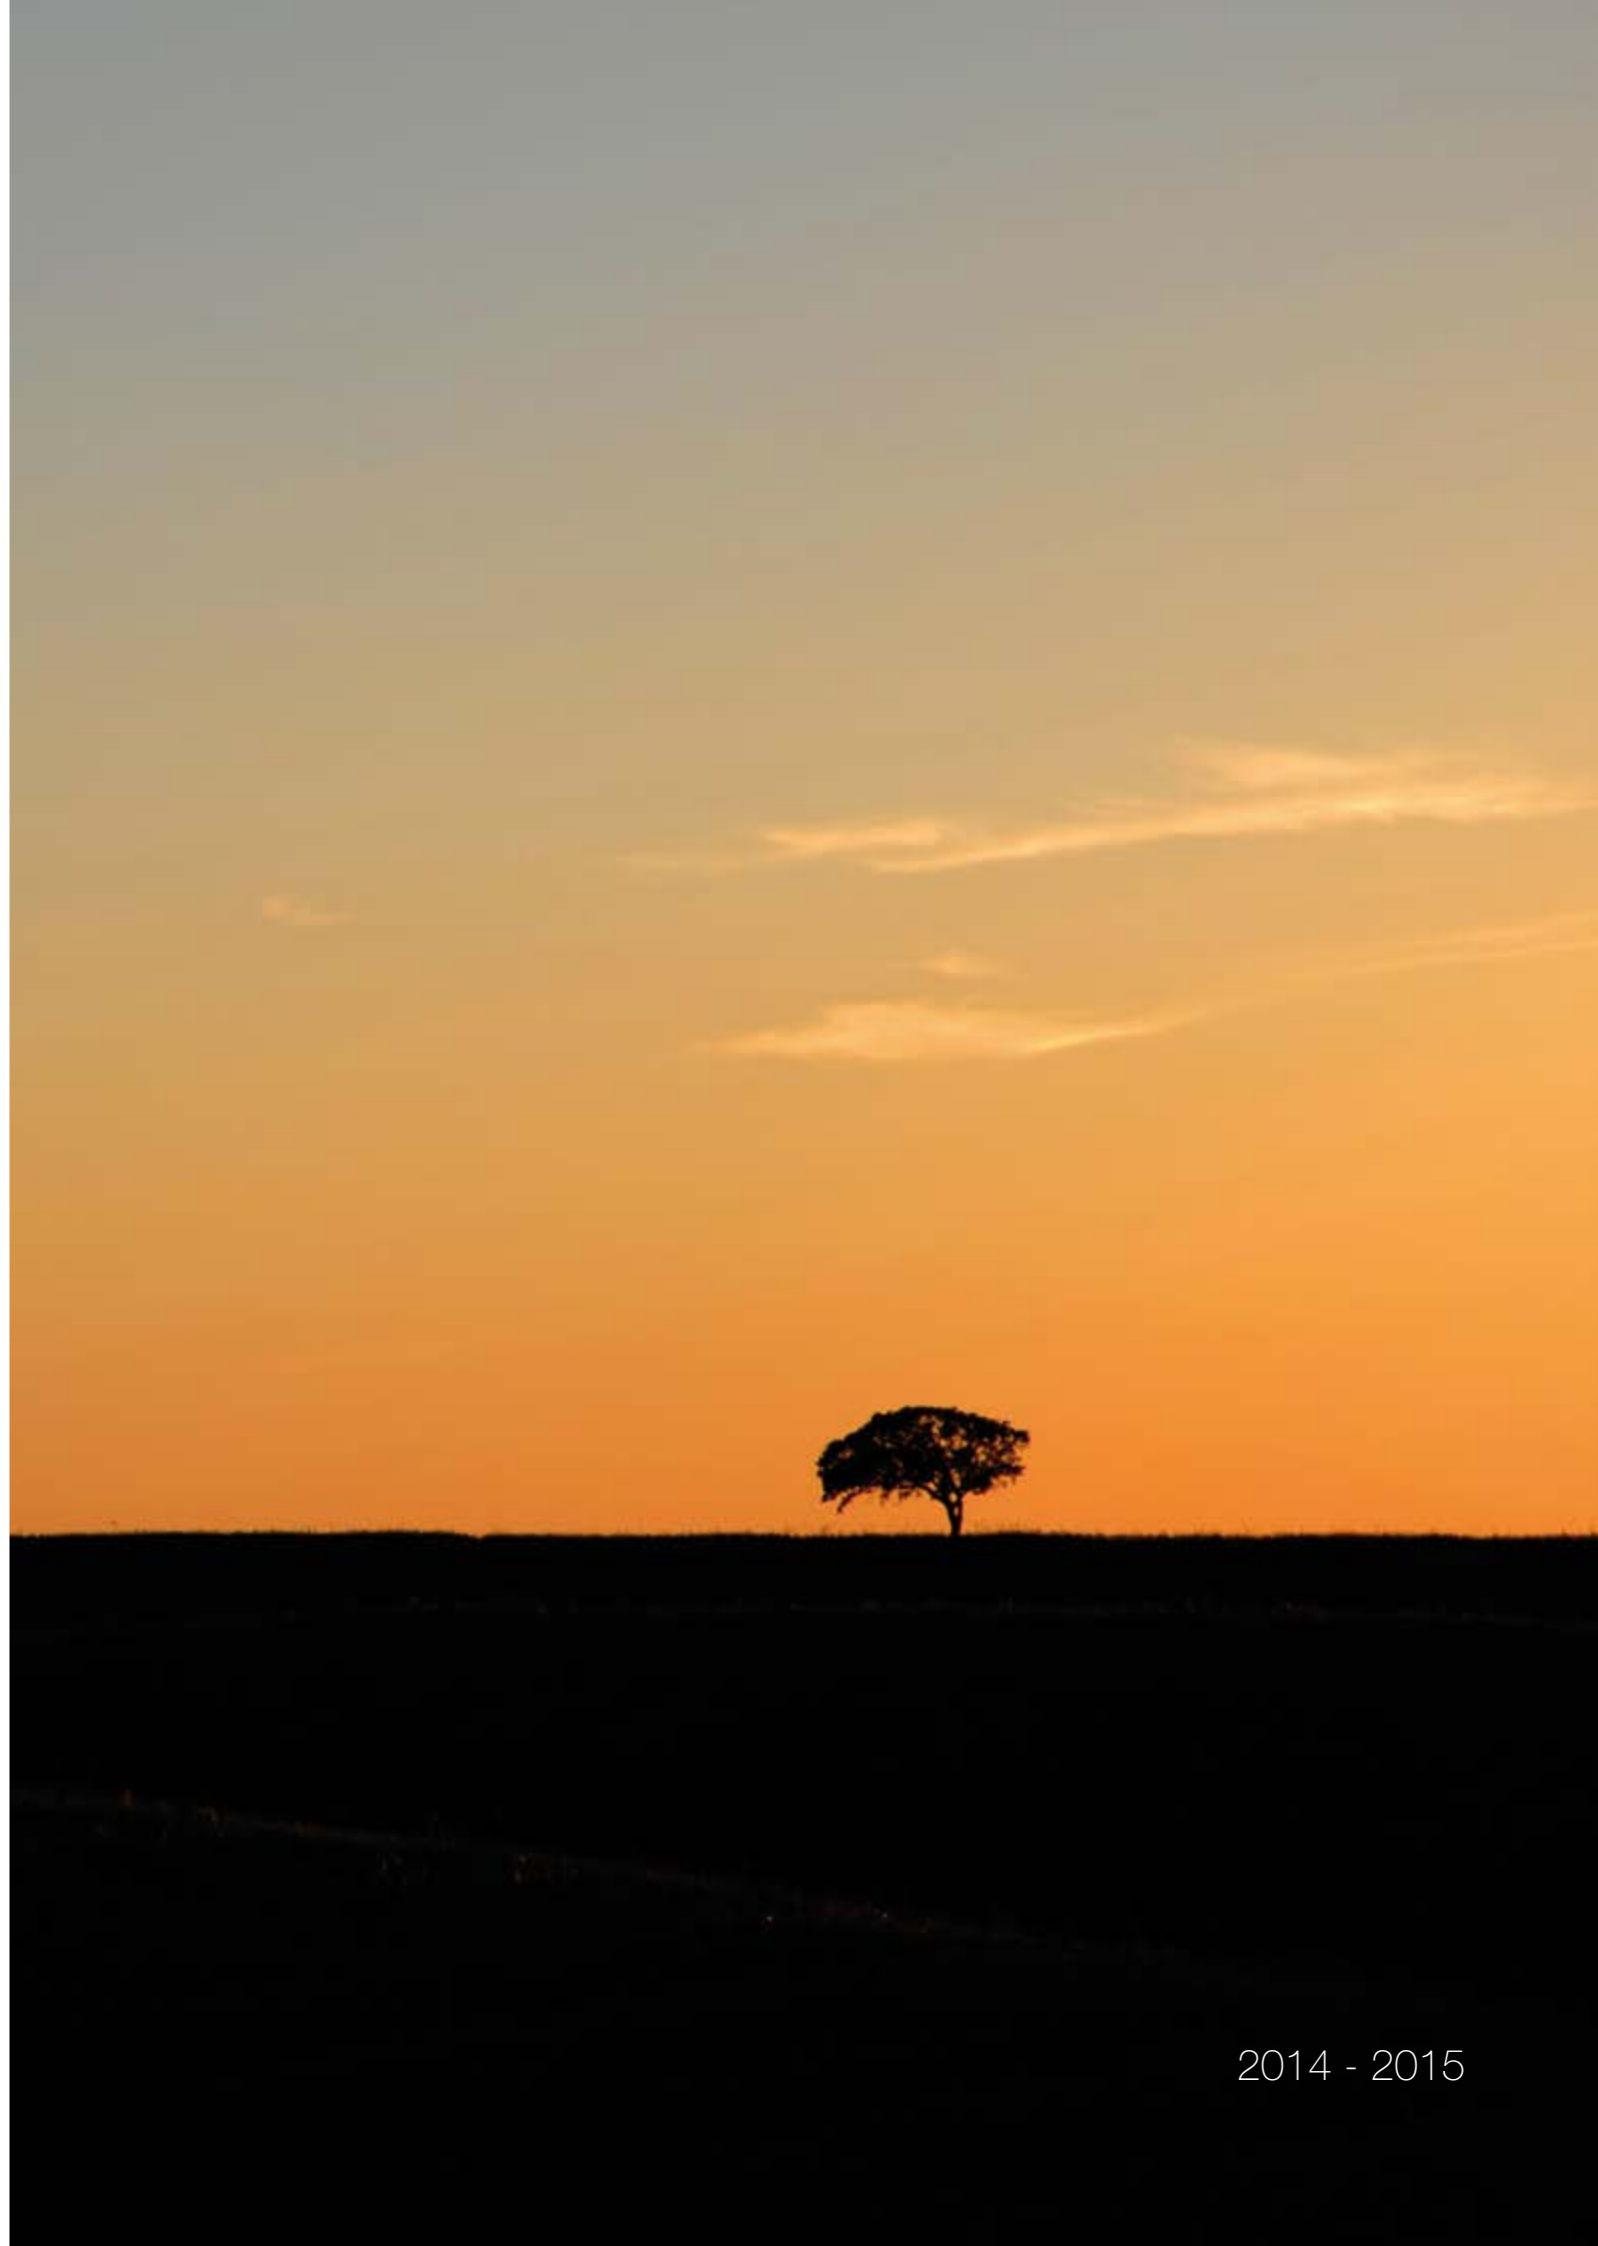

# Who we are

GRANORTE is a Portuguese family company, founded in 1972 to recycle the cork waste from the wine cork stoppers manufacturing industry. From the beginning we have dedicated our attention to product research and development, resulting on innovative production processes and technical excellence.

Our significant know-how in cork allowed us to develop into an expanding producer of technical solutions using cork. Today, GRANORTE is a leading sustainable flooring manufacturer, producer of thrilling environmentally responsible products. One tradition was kept unchanged however: the quiet revolutionary way of promote ongoing, consistent, breakthrough creativity. This innovation culture and teamwork encouraging have been the basis of our success.



Elected in 2005 the best Portuguese company in the area of wood, cork and furniture.  
"PME Líder", recognizing the company's work as an example of excellence, quality and leadership.  
2012 Best SME, Export and Internationalization Awards BES / Jornal de Negócios.  
Certified NP EN ISO 9001.  
Certified SYSTECODE.  
Certified FSC® and PEFC Chain-Of-Custody.






# How we do it

Our philosophy is to challenge what has become habitual, and to never be satisfied with anything less than the best. We seek perfection each and every day and ensure that our products meet all international quality requirements and technical specifications. Our aim is to fascinate people, designing and creating stunning cork products that capture the imagination and inspire beautiful and eco-friendly interiors.

Using only the best raw materials and state-of-the-art technology, GRANORTE offers a diverse range of products for both residential and commercial environments, delivering eye-catching styles as well as superb quality.



High Performance Ceramic Finish with very high wear, impact, scratch and slip resistance.



Very low emissions (Emission EC1 R) 2-Component waterborne finish, based on polyurethane resins with very high final hardness, great elasticity and excellent chemical resistance.



Low swelling and moisture resistant High Density Fibreboard. CARB phase 2 and Lacey Act compliant.



Micro-bevelled edge aesthetic enhancement.



Proprietary HDDP technology that delivers unrivalled print quality as its high native resolution together with its variable dot printing (greyscale) capability provide an effective resolution of over 1000 dpi.



All floating floors from GRANORTE use the industry's leading UNICLIC® profile.



GREENGUARD® Indoor air quality certification for low-emitting interior building materials meeting stringent emissions standards based on established chemical exposure criteria.



Information representing in indoor air emissions of volatile substances presenting a risk of inhalation toxicity, on a scale ranging from Class C (high emissions) to A+ (very low emissions), according to the French decree for the labelling of construction products.



Exclusive Microban® antibacterial protection embedded in the agglomerated cork.



International symbol used to identify products made with genuine cork.



HotCoating® PUR and waterbased finish with very high wear, impact and chemical resistance with a natural look-and-feel.



Hard cured oil finish for a natural wax-oil look-and-feel.



Edge impregnation system for improved moisture resistance and superior joint protection.



Formaldehyde-free cork agglomeration technology.



Production technology that finely emboss wood structure making floors look and feel natural.



Quality mark that ensures product quality, eco-friendliness, sustainability and the meeting of technical and chemical European requirements in terms of pollutant emissions.



German DIBt (German Institute for Construction Technology) U mark conformity.



Certification for safety and energy-saving performance.



materiO is a technology watch service, selecting specific, atypical and innovative materials dedicated to architects, designers and any creative professionals





## Why cork

Cork is the outer bark of the cork oak tree, which grows mainly in the Mediterranean region of the world. This tree has a life span of about 200 years. Each cork tree must be 20 to 25 years old before it can provide its first harvest of cork. After extracting the cork a new layer starts generating and nine years have to pass until a new harvest can take place. The cork harvesting is made in a sustainable manner and does not harm the tree which is never cut down or removed.

With the increasing concern for the environment, cork oak remains the only tree whose bark can regenerate itself after harvest leaving the tree unharmed. Furthermore, the cork oak tree has the remarkable capacity to retain carbon and a harvested cork tree fixates almost five times more carbon. These exceptional characteristics make cork a naturally sustainable product and its use contributes to the preservation of a unique habitat in the world.

Cork is the perfect environmentally friendly material and the ideal option when looking for floor and wall coverings that offer a naturally sustainable alternative. It is also amazingly versatile, and designers can explore the material in a surprisingly creative fashion. By altering colour and the way the cork is 'laid up' it becomes possible to create a whole range of textures and visual effects, without upsetting performance and maintaining cork's natural properties.

With over 40 million natural "cushion cells" per cubic centimetre, cork is a natural sound and thermal insulator, comfortable underfoot, quiet, warm and pleasant to the touch. Cork coverings do not absorb dust and are resistant to bacteria and fungus. They do not cause allergies nor pose a risk to asthma sufferers and have very low volatile organic compounds (VOC) emissions.



**easy**  
installation

**noise**  
reduction

**safe**  
hygienic

functionality  
&  
**design**

**soft**  
**warm**  
comfortable

**durable**  
**strong**

**lifetime**  
structural  
warranty

**eco**  
friendly





# We care

GRANORTE recognizes that business leadership carries a responsibility to the environment and the world's forests. We contribute to the development of environmental solutions that conserve, protect and restore forests, supporting responsible forest management practices that both protect biodiversity and ecosystem integrity and result in long-term social and economic benefits to human communities.

We promote responsible business practices at every level of the company. We strive to conduct business ethically, honestly and with sensitivity toward social, cultural, economic and environmental issues. We integrate these core values into every aspect of our business and with our passion we use them to multiply social impact around the world.



Becoming a member of the WWF's Global Forest & Trade Network is part of our continuing focus on the strategy for sustainable growth and commitment to the use of cork and wood from sustainable sources.

We believe in a more sustainable built environment. As a U.S. Green Building Council member, we promote green building and contribute to give people better, brighter, healthier spaces to live, work and play.

Through the partnership with the non-profit charity organization Habitat for Humanity, GRANORTE is donating cork flooring material to every new home built by HFH in the Europe and Central Asia region. HFH seeks to eliminate poverty housing and homelessness from the world and to make decent shelter a matter of conscience and action worldwide.







## Cork Floating Floors

emotions




20  
910 x 300 x 10,5 mm




Standard 20 248 00



Standard Cream 20 210 11

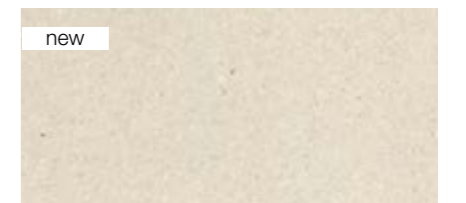


Standard White 20 210 12

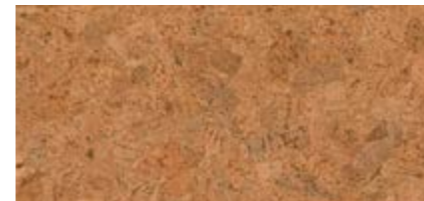


Champagner 20 040 00



Champagner Sand 20 039 14

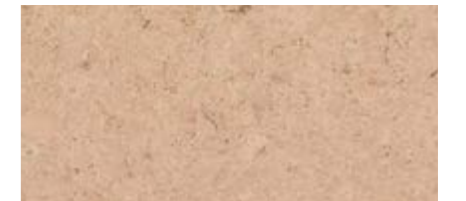


Champagner White 20 039 16

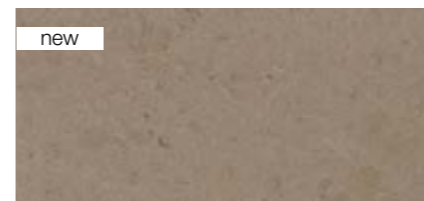

Champagner Grey 20 039 43



Twist 20 901 00

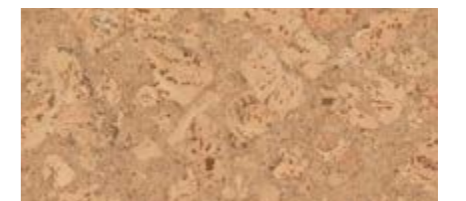

Twist Sand 20 901 14



Twist White 20 901 16



Twist Brown 20 901 21



Twist Beige 20 901 40



Twist Olive 20 901 29



Primus 20 179 00



Primus Sand 20 179 14

Primus Sand





Element Rustic Olive

## Cork Floating Floors

emotions






high performance coating    moisture resistant HDF    edge sealing technology    no added formaldehyde




residential warranty 10 years    commercial warranty 5 years












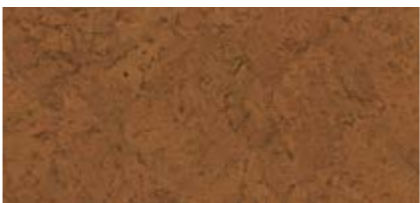









PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS (UL GREENGUARD)    \*Information sur le niveau d'émission de substances volatiles dans l'air intérieur. Répondant à un niveau de qualité supérieur à celui des autres produits de revêtement de sol en matière d'émission de substances volatiles dans l'air intérieur. (www.fsc.org)    Das Kork-Logo    Microban antibacterial protection    FSC www.fsc.org FSC® C044081 The mark of responsible forestry



20  
910 x 300 x 10,5 mm

 Element 20 801 00	 Element Rustic Cream 20 111 11	 Element Rustic Khaki 20 111 44
 Element Rustic Olive 20 111 29	 River 20 131 00	 Swirl 20 941 00
 Chip White 20 951 12	 Chip Beige 20 951 40	 Lava 20 201 00
 Lava Sand 20 201 14	 Lava Brown 20 201 21	 Country Beige 20 241 40
 Country Brown 20 241 26	 Country Olive 20 241 29	 Country Slate 20 241 46
 Nobel 20 191 00	 Nobel Select 20 191 82	 Nobel Cream 20 191 11





# Cork Floating Floors

studio




<b>HCA2K</b> hybrid ceramic hotcoating	<b>HIDROCORE</b> moisture resistant HDF	<b>JOINT SHIELD</b> edge sealing technology	<b>MICROBEVEL</b> 4 edges micro-beveled	<b>AGGLOPUR<sup>e</sup></b> no added formaldehyde
residential warranty <b>10</b> years	commercial warranty <b>5</b> years	<b>GREENGUARD</b> PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS UL GREENGUARD UL 2818	<b>A+</b> *Information sur le niveau d'émission de substances volatiles dans l'air intérieur, indiquant un niveau de santé par rapport à un niveau de référence de A+ (les valeurs d'émission à ce niveau sont les plus faibles).	<b>Das Kork-Logo</b> BIRKEN SPRISBAU LL
<b>Microban</b> antibacterial protection	<b>FSC</b> www.fsc.org FSC® C044081 The mark of responsible forestry			



**40**  
910 x 300 x 10,5 mm

**43**  
1164 x 194 x 10,5 mm

**44**  
388 x 388 x 10,5 mm

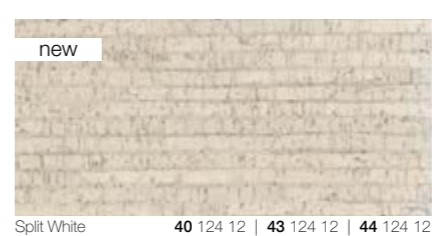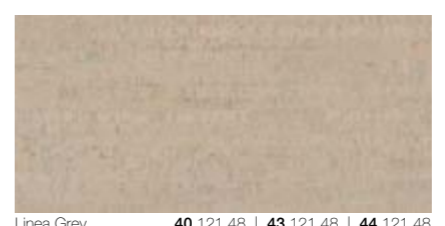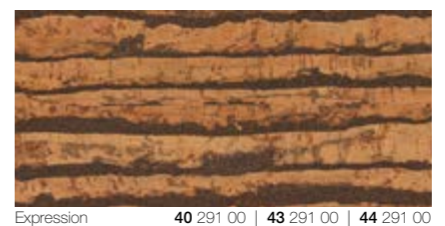

Expression Sand





## Cork Floating Floors

studio

<b>HCA2K</b> hybrid ceramic hotcoating	<b>HIDROCORE</b> moisture resistant HDF	<b>JOINT SHIELD</b> edge sealing technology	<b>MICRO BEVEL</b> 4 edges micro-beveled	<b>AGGLOPUR<sup>e</sup></b> no added formaldehyde
residential warranty <b>10</b> years	commercial warranty <b>5</b> years	<b>GREENGUARD</b> PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS (UL GREENGUARD LG-2578)	<b>A+</b> Information sur le niveau d'émission de substances volatiles dans l'air intérieur. Répondant à un niveau de qualité certifié A+ (les valeurs d'émission de A+ sont les plus faibles émises à ce jour) (en français)	<b>Das Kork-Logo</b> BETONNEUR SINCE 1994
<b>Microban</b> antibacterial protection	<b>FSC</b> www.fsc.org FSC® C044081 The mark of responsible forestry			



**40**  
910 x 300 x 10,5 mm

**43**  
1164 x 194 x 10,5 mm

**44**  
388 x 388 x 10,5 mm

 Canyon Zimt   <b>40</b> 155 22   <b>43</b> 155 22   <b>44</b> 155 22	 Nobel   <b>40</b> 191 00   <b>43</b> 191 00   <b>44</b> 191 00	 Nobel Select   <b>40</b> 191 82   <b>43</b> 191 82   <b>44</b> 191 82
 Nobel White   <b>40</b> 191 10   <b>43</b> 191 10   <b>44</b> 191 10	 Nobel Brown   <b>40</b> 191 21   <b>43</b> 191 21   <b>44</b> 191 21	 String White   <b>40</b> 645 12   <b>43</b> 645 12   <b>44</b> 645 12
 Contour Cream   <b>40</b> 647 11   <b>43</b> 647 11   <b>44</b> 647 11	 Contour Brown   <b>40</b> 647 21   <b>43</b> 647 21   <b>44</b> 647 21	 Mesh Cream   <b>40</b> 649 11   <b>43</b> 649 11   <b>44</b> 649 11
 Mesh Grey   <b>40</b> 649 43   <b>43</b> 649 43   <b>44</b> 649 43	 Mesh Brown   <b>40</b> 649 24   <b>43</b> 649 24   <b>44</b> 649 24	 Trek Beige   <b>40</b> 657 40   <b>43</b> 657 40   <b>44</b> 657 40
 Mosaic Cream   <b>40</b> 650 11   <b>43</b> 650 11   <b>44</b> 650 11	 Mosaic Sage   <b>40</b> 650 29   <b>43</b> 650 29   <b>44</b> 650 29	 Bit White   <b>40</b> 652 12   <b>43</b> 652 12   <b>44</b> 652 12

Fineline Grey

FSC® certified products are available upon request.





# Cork Floating Floors

bloom

**WEARTOP armour** high performance coating | **HIDROCORE+** moisture resistant HDF | **JOINT SHIELD** edge sealing technology | **AGGLOPURE** no added formaldehyde










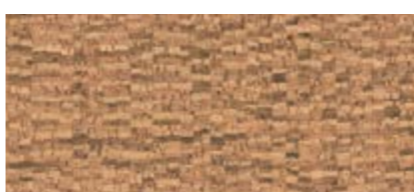





residential warranty **10** years | commercial warranty **5** years

**GREENGUARD** PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS (UL 2713) | **A+** ÉMISSIONS DANS L'AIR INTÉRIEUR (A+ A B C) | **Das Kork-Logo** | **Microban** antibacterial protection | **FSC** FSC® C044081 The mark of responsible forestry



25  
910 x 300 x 10,5 mm



 Green 25 611 82	 Jeans 25 612 82	 Terra 25 613 82
 Amber 25 614 82	 Midnight 25 615 00	 Safari 25 622 00
 Zebra 25 624 00	 String 25 645 00	 Contour 25 647 00
 Mesh 25 649 00	 Trek 25 657 00	 Mosaic 25 650 00
 Bit 25 652 00	 Grid 25 654 00	 Nobel Rustic 25 625 00

Terra





Champagner White

## Cork Floating Floors


ambient

<b>HARDOIL</b> hard-wax-oil finish	<b>HIDROCORE</b> moisture resistant HDF	<b>JOINT SHIELD</b> edge sealing technology	<b>AGGLOPURE</b> no added formaldehyde
---------------------------------------	--	--	---



residential  
warranty  
**5**  
years


**30**  
910 x 300 x 10,5 mm



Standard **30 248 00**



Standard Cream **30 210 11**

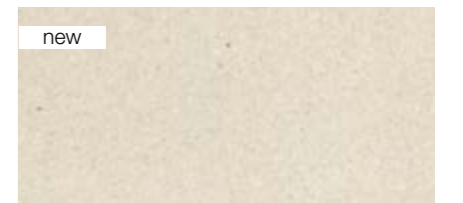


Standard White **30 210 12**




Champagner **30 040 00**



Champagner Sand **30 039 14**

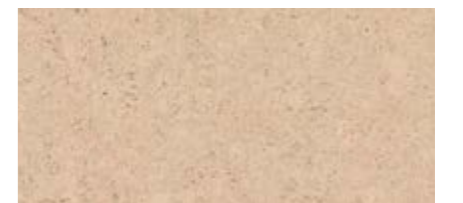

Champagner White **30 039 16**

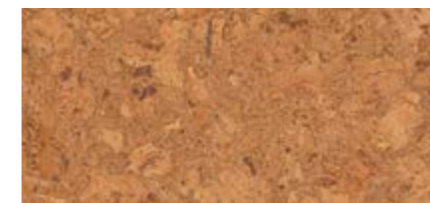

Twist **30 901 00**



Twist Sand **30 901 14**




Twist White **30 901 16**



Element **30 801 00**



Element Rustic Cream **30 111 11**

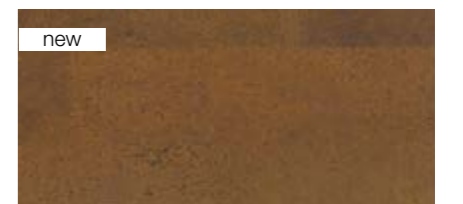

Element Rustic Brown **30 111 21**





# Cork Floating Floors

recolour

<b>AQUA2K+</b> 2K waterborne finish	<b>HIDROCORE+</b> moisture resistant HDF	<b>MICRO-BEVEL</b> 4 edges micro-beveled	<b>AGGLOPUR<sup>e</sup></b> no added formaldehyde
--	---	---	--



residential warranty <b>10</b> years	commercial warranty <b>5</b> years
--	--

**16**  
610 x 380 x 10,5 mm

<b>GREENGUARD</b> PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS UL GREENGUARD 101319	<b>EMISSIONS DANS L'AIR INTERIEUR</b> <b>A+</b> A+ A B C	<b>Das Kork-Logo</b> BIRKEN BRUNNEN	<b>Microban</b> antibacterial protection	<b>FSC</b> www.fsc.org FSC® C044081 The mark of responsible forestry
---	--	---	---	--

White <b>16 231 12</b>	Cream <b>16 231 11</b>	Sand <b>16 231 14</b>
Silver <b>16 231 48</b>	Grey <b>16 231 45</b>	Concrete <b>16 231 49</b>
Shadow <b>16 231 20</b>	Coal <b>16 231 42</b>	Khaki <b>16 231 44</b>
Tan <b>16 231 26</b>	Coffee <b>16 231 27</b>	Burgundy <b>16 231 64</b>
Red <b>16 231 63</b>	Yellow <b>16 231 62</b>	Jade <b>16 231 66</b>
Olive <b>16 231 67</b>	Blue <b>16 231 69</b>	Teal <b>16 231 68</b>





# Digital Print Cork Floating Floors

vita

<b>HDDP</b> high definition digital print	<b>HCA2K</b> hybrid ceramic hotoating	<b>MICRO-BEVEL</b> 4 edges micro-beveled	<b>AWS</b> authentic wood structure	<b>AGGLOPUR<sup>e</sup></b> no added formaldehyde
residential warranty <b>10</b> years	commercial warranty <b>5</b> years	<b>GREENGUARD</b> PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS UL GREENGUARD 101-2018	<b>Das Kork-Logo</b> EMMISSIONS DANS L'AIR INTERIEUR <b>A+</b> A+ A B C	<b>Microban</b> antibacterial protection
<b>FSC</b> www.fsc.org FSC® C044081 The mark of responsible forestry				



new **AWS** 46  
1746 x 194 x 13,5 mm

47  
1746 x 194 x 13,5 mm



new **AWS** 162  
900 x 150 x 4 mm

<b>new</b> Heartwood Beech 46 004 01   47 004 01 162 004 01	<b>new</b> Apple Birch 46 005 01   47 005 01 162 005 01	<b>new</b> Olivewood 46 006 01   47 006 01 162 006 01
<b>new</b> Oak Burl 46 001 08   47 001 08 162 001 08	<b>new</b> Oak Antique 46 001 01   47 001 01 162 001 01	<b>new</b> Oak Java 46 001 04   47 001 04 162 001 04
<b>new</b> Oak Blond 46 001 02   47 001 02 162 001 02	<b>new</b> Oak Siena 46 001 07   47 001 07 162 001 07	<b>new</b> Oak Camel 46 001 03   47 001 03 162 001 03
<b>new</b> Oak Pearl 46 001 05   47 001 05 162 001 05	<b>new</b> Oak Blanc 46 001 06   47 001 06 162 001 06	<b>new</b> Larch Sierra 46 002 04   47 002 04 162 002 04
<b>new</b> Larch Spice 46 002 01   47 002 01 162 002 01	<b>new</b> Larch Country 46 002 02   47 002 02 162 002 02	<b>new</b> Larch Frost 46 002 03   47 002 03 162 002 03
<b>new</b> Ash Sand 46 003 01   47 003 01 162 003 01	<b>new</b> Ash Sand 2-Strip 46 203 02   47 203 02 162 203 02	<b>new</b> Ash Vintage 3-Strip 46 303 03   47 303 03 162 303 03

Oak Java





## Recycled Leather & Cork Floating Floors

corium



54  
1164 x 194 x 10,5 mm


57

388 x 388 x 10,5 mm



new 07


600 x 450 x 4 mm

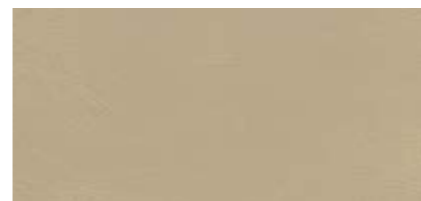


Calabria Vaniglia 54 001 10 | 57 001 10  
07 001 10




Calabria Cannella 54 001 04 | 57 001 04  
07 001 04

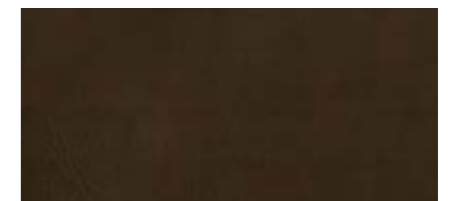

Calabria Cacao 54 001 01 | 57 001 01  
07 001 01

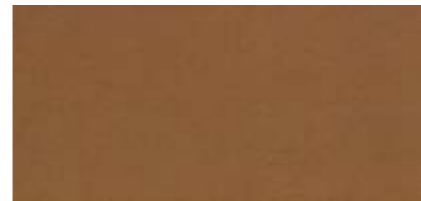


Calabria Marrone 54 012 26 | 57 012 26  
07 012 26

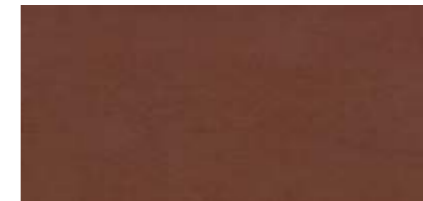


Calabria Granata 54 012 25 | 57 012 25  
07 012 25



Umbria Bianco 54 010 21 | 57 010 21  
07 010 21

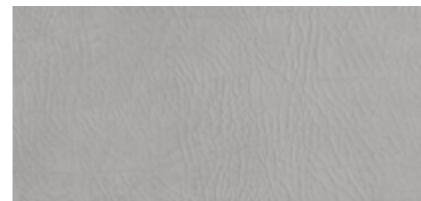


Umbria Grigio 54 010 22 | 57 010 22  
07 010 22

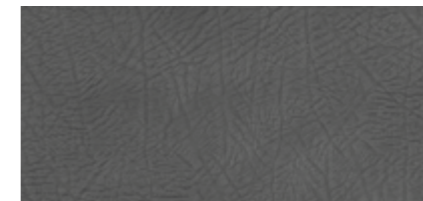

Umbria Ardesia 54 010 23 | 57 010 23  
07 010 23



Umbria Nero 54 007 03 | 57 007 03  
07 007 03

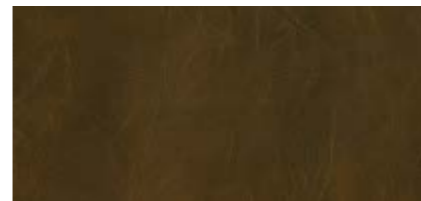


Umbria Seppia 54 007 11 | 57 007 11  
07 007 11



Veneto Bistrot 54 002 05 | 57 002 05  
07 002 05




Veneto Borgogna 54 002 06 | 57 002 06  
07 002 06

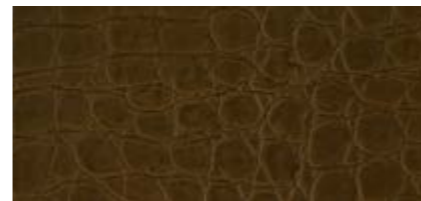

Veneto Seppia 54 002 11 | 57 002 11  
07 002 11



Toscana Ruggine 54 004 08 | 57 004 08  
07 004 08

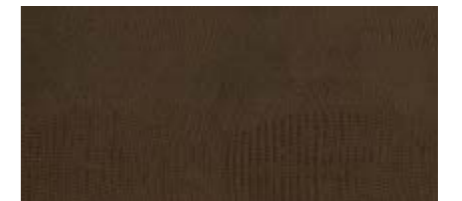

Lombardia Antico 54 005 09 | 57 005 09  
07 005 09





Luxury Vinyl & Cork Floating Floors

vinylcork | vinylcork PRO new

<b>HIDROCORE</b> moisture resistant HDF	<b>JOINT SHIELD</b> edge sealing technology	<b>MICRO-BEVEL</b> 4 edges micro-beveled	<b>AGGLOPUR<sup>e</sup></b> no added formaldehyde	0.3 0.5 wear layer
residential warranty <b>15</b> years	vinylcork 32	vinylcorkPRO 33	commercial warranty <b>5</b> years	



new vinylcorkPRO  
0,5 wear layer **136**  
1164 x 194 x 10,5 mm

0,3 wear layer **36**  
1164 x 194 x 10,5 mm

0,3 wear layer **37**  
910 x 300 x 10,5 mm

<b>GREENGUARD</b> PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS UL 2713	<b>A+</b> A+ A B C *Information sur le niveau d'émission de substances volatiles dans l'air intérieur, consultez le rapport de certification sur le site internet de l'organisme certifiant. *Information on the level of indoor air emissions, see the certification report on the certifying organization's website.	<b>micro ceramic</b> enhanced wear layer	<b>Microban</b> antibacterial protection	<b>FSC</b> www.fsc.org FSC® C044081 The mark of responsible forestry
---	---	---	---	---

Dune <b>36 019 05   136 019 05</b>	Sunset <b>36 070 01   136 070 01</b>	Cottage <b>36 013 51   136 013 51</b>
Tavern <b>36 014 01   136 014 01</b>	Cool <b>36 000 14   136 000 14</b>	Artisan <b>36 054 61   136 054 61</b>
Sahara <b>36 070 03   136 070 03</b>	Iceland <b>36 081 33   136 081 33</b>	Cornfield <b>36 002 32   136 002 32</b>
Navajo <b>36 031 51   136 031 51</b>	Dove <b>36 031 52</b>	Polar <b>36 013 31</b>
Glacier <b>36 017 91</b>	Graphite <b>36 081 14</b>	Amazon <b>36 090 04</b>
Fawn <b>36 019 06</b>	Autumn <b>36 017 12</b>	Newport <b>36 013 81</b>

Storm





Luxury Vinyl & Cork Floating Floors

vinylcork

<b>HIDROCORE</b> moisture resistant HDF	<b>JOINT SHIELD</b> edge sealing technology	<b>MICRO-BEVEL</b> 4 edges micro-beveled	<b>AGGLOPUR<sup>e</sup></b> no added formaldehyde	0.3 0.5 wear layer
--	--	---	--	--------------------------

residential warranty <b>15</b> years	vinylcork 32	vinylcorkPRO 33	commercial warranty <b>5</b> years
--	-----------------	--------------------	--

<b>GREENGUARD</b> PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS UL GREENGUARD UL 2713	<b>A+</b> A+ A B C *Information sur le niveau d'émission de substances volatiles dans l'air intérieur, consultez le site www.fsc.org	ceramic enhanced wear layer	<b>Microban</b> antibacterial protection	<b>FSC</b> www.fsc.org FSC® C044081 The mark of responsible forestry
--	--	--------------------------------	---	---



0,3 wear layer **36**  
1164 x 194 x 10,5 mm

0,3 wear layer **37**  
910 x 300 x 10,5 mm

Antique <b>36 014 03</b>	Vintage <b>36 017 13</b>	Barn <b>36 081 17</b>
Seaside <b>36 081 16</b>	Galleon <b>36 017 41</b>	Desert <b>36 056 21</b>
Smoke <b>36 091 11</b>	Alabaster <b>36 019 16</b>	Sierra <b>36 091 12</b>
new Spark <b>36 015 18</b>	new Pearl <b>36 000 05</b>	new Shell <b>36 000 31</b>
Tawny <b>36 013 41</b>	Charcoal <b>36 000 25</b>	Storm <b>36 000 22</b>
Ambassador <b>37 002 02</b>	Bianco <b>37 002 03</b>	Dynasty <b>37 001 15</b>





# Linoleum & Cork Floating Floors

linocork

**HIDROCORE**  
moisture resistant HDF

**JOINT SHIELD**  
edge sealing technology

**AGGLOPUR<sup>e</sup>**  
no added formaldehyde

**UNICLIC**




residential warranty  
**15**  
years



commercial warranty  
**5**  
years

60  
910 x 300 x 10,5 mm



Breeze 60 035 75



Blond 60 052 30



Prairie 60 052 17



Glacier 60 035 76



Granite 60 052 26



Nature 60 035 73



Pearl 60 030 38



Wheat 60 030 75



Camel 60 032 33



Warm Grey 60 032 34



Black 60 029 39



Steel Blue 60 030 53




Deep Red 60 031 27



Sienna 60 031 63



Terracotta 60 031 64

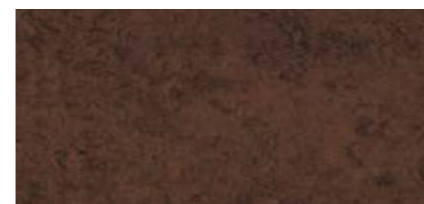

Coffee 60 027 84



Concrete 60 006 01



Spa 60 008 02





Linoleum & Cork Floating Floors

linocork UNI

<b>AQUA2K</b> 2K waterborne finish	<b>HIDROCORE</b> moisture resistant HDF	<b>MICROBEVEL</b> 4 edges micro-beveled	<b>AGGLOPUR<sup>e</sup></b> no added formaldehyde
---------------------------------------	--	--	--



residential warranty <b>15</b> years	commercial warranty <b>5</b> years
---	---------------------------------------

59  
388 x 388 x 10,5 mm

<b>GREENGUARD</b> PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS UL GREENGUARD UL 2818	<b>EMISSIONS DANS L'AIR INTERIEUR</b> <b>A+</b> A+ A B C	<b>Microban</b> antibacterial protection	<b>FSC</b> www.fsc.org FSC® C044001 The mark of responsible forestry
--	--	---	--

 Caramel 59 000 07	 Pompeji Red 59 000 10	 Capri Blue 59 000 22
 Sage Green 59 000 36	 Silver Grey 59 000 54	 Frost Grey 59 000 59
 Deep Brown 59 000 60	 Black 59 000 80	 Nikel Grey 59 000 81
 Broken Grey 59 000 82	 Industrial Grey 59 000 83	 Dark Shadow 59 000 84

Frost Grey and Nikel Grey





## Wood & Cork Floating Floors

heritage

<b>HCA2K</b> hybrid ceramic hotcoating	<b>HIDROCORE+</b> moisture resistant HDF	<b>AGGLOPUR®</b> no added formaldehyde	<b>MICRO-BEVEL</b> 4 edges micro-beveled
---	---	---	---



residential warranty <b>10</b> years	commercial warranty <b>5</b> years
--	--

52  
1164 x 194 x 10,5 mm

<b>GREENGUARD</b> PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS UL GREENGUARD UL 2818	<b>EMISSIONS DANS L'AIR INTERIEUR</b> <b>A+</b> A+ A B C *Information sur le niveau d'émission de substances volatiles dans l'air intérieur, rendez-vous sur le site de la Santé Canada pour plus d'information sur l'usage et les précautions d'emploi des produits émetteurs à l'intérieur (mobilier).	<b>Microban</b> antibacterial protection	<b>FSC</b> www.fsc.org FSC® C044001 The mark of responsible forestry
--	---	---	--

Maple Sand 52 312 14	Cherry 52 311 00	Sucupira 52 345 00
Bubinga 52 348 00	Walnut 52 320 00	Teak 52 315 00
Zebrano Sand 52 625 14	Bamboo 52 190 00	Oak 2 Strip 52 624 00
Oak Rustic 52 316 00	Oak Antique 52 316 29	Oak Silver 52 314 45
Oak Shadow 52 314 42	Ash Rustic Grey 52 333 48	Ash Rustic Sand 52 333 14

Walnut

FSC® certified products are available upon request.





## Cork Floor Tiles

tradition


**AGGLOPUR<sup>e</sup>**  
no added formaldehyde



residential  
warranty  
**10**  
years



commercial  
warranty  
**5**  
years



**GLUE-DOWN**

**72**  
600 x 300 x 4 mm

**73**  
300 x 300 x 4 mm

**80**  
600 x 450 x 4 mm

Standard 72 214 00   80 214 00	Mineral 72 220 00   80 220 00	Mystic 72 440 00   80 440 00	Champagner 72 040 00   80 040 00
Mocha 72 100 00   80 100 00	Classic 72 101 00   80 101 00	Rondo 72 920 00   80 920 00	Arabesque 72 910 00   80 910 00
Twist 72 901 00   80 901 00	Twist Black 72 901 93   80 901 93	Twist Red 72 901 91   80 901 91	Twist Orange 72 901 94   80 901 94
Twist Green 72 901 92   80 901 92	Forest 72 700 00   80 700 00	Castello 72 241 00   80 241 00	River 72 131 00   80 131 00
Lava 72 201 00   80 201 00	Element 72 800 00   80 800 00	Element Rustic 72 110 00   80 110 00	Element Schmal 72 231 00   80 231 00
Parallel 72 121 00   80 121 00	Horizon 72 221 00   80 221 00	Kwadrat 72 160 00   80 160 00	Expression 72 291 00   80 291 00





# Cork Floor Tiles


tradition



residential  
warranty  
**10**  
years




commercial  
warranty  
**5**  
years



**72**  
600 x 300 x 4 mm

**73**  
300 x 300 x 4 mm

**80**  
600 x 450 x 4 mm



new  
Fineline **72 310 00** | **73 310 00** | **80 310 00**



new  
Fineline Dark **72 301 00** | **73 301 00** | **80 301 00**



Canyon **72 155 00** | **73 155 00** | **80 155 00**



Primus **72 179 00** | **73 179 00** | **80 179 00**



Diagonal **72 796 00** | **73 796 00** | **80 796 00**




new  
Bravo **72 177 00** | **73 177 00** | **80 177 00**



Nobel **72 191 00** | **73 191 00** | **80 191 00**




Nobel Select **72 191 82** | **73 191 82** | **80 191 82**




new  
Safari **72 622 00** | **73 622 00** | **80 622 00**




new  
Zebra **72 624 00** | **73 624 00** | **80 624 00**



new  
String **72 644 00** | **73 644 00** | **80 644 00**



new  
Contour **72 646 00** | **73 646 00** | **80 646 00**



new  
Mesh **72 649 00** | **73 649 00** | **80 649 00**




new  
Trek **72 656 00** | **73 656 00** | **80 656 00**




new  
Mosaic **72 650 00** | **73 650 00** | **80 650 00**




new  
Bit **72 652 00** | **73 652 00** | **80 652 00**




new  
Grid **72 654 00** | **73 654 00** | **80 654 00**




new  
Nobel Rustic **72 625 00** | **73 625 00** | **80 625 00**




new  
Split **72 123 00** | **73 123 00** | **80 123 00**




new  
Green **72 611 82** | **73 611 82** | **80 611 82**



new  
Jeans **72 612 82** | **73 612 82** | **80 612 82**



new  
Terra **72 613 82** | **73 613 82** | **80 613 82**



new  
Amber **72 614 82** | **73 614 82** | **80 614 82**



new  
Midnight **72 615 00** | **73 615 00** | **80 615 00**





Cork Wall Tiles



decodalle  
new

























PARAWAX  
flexible wax coating

AGGLOPUR<sup>e</sup>  
no added formaldehyde

GLUE-DOWN

05  
600 x 300 x 3 mm



			
Grain 05 020 00	Champagner 05 039 00	Mystic 05 440 00	Mocha 05 100 00
			
Element 05 800 00	Element Rustic 05 110 00	Element Rustic Brown 05 110 86	Twist 05 900 00
			
Twist Red 05 900 91	Twist Black 05 900 93	Parallel 05 121 00	Parallel Cream 05 121 11
			
River 05 131 00	Canyon 05 155 00	Kwadrat 05 160 00	Country 05 241 00
			
Country Blue 05 241 87	Country Green 05 241 88	Country Red 05 241 89	Country Black 05 241 90
			
Country White 05 241 81	Country Cream 05 241 71	Country Ivory 05 241 72	Country Camel 05 241 73

Country white





Solid agglomerated cork skirtings

Standard agglomerated cork, natural	900 x 70 x 8 mm	95 701 00
Standard agglomerated cork, varnished matt	900 x 70 x 8 mm	95 702 00




Self adhesive strip skirtings (click system)

Maple foiled mdf skirting	2400 x 58 x 19 mm	95 412 00
Oak foiled mdf skirting	2400 x 58 x 19 mm	95 413 00
Wenge foiled mdf skirting	2400 x 58 x 19 mm	95 414 00
Plain white foiled mdf skirting	2400 x 58 x 19 mm	95 415 00



Cork strip of any type of the CORK Collections	920 x 50 x 2 mm	83 XXX XX
Linoleum strip of any type of the linocork Collection	920 x 50 x 2 mm	84 XXX XX
Leather strip of any type of the corium Collection	920 x 50 x 2 mm	85 XXX XX
Vinyl strip of any type of the vinylcork Collection	1200 x 50 x 2 mm	86 XXX XX
Wood strip of any type of the heritage Collection	1165 x 50 x 2 mm	87 XXX XX



Clip holder (30 pieces) for installing skirtings		95 096 00
--	--	-----------



Digital printed skirtings (click system)

Digital printed foiled mdf skirting of vita designs	2500 x 58 x 18 mm	96 6XX XX
Digital printed foiled mdf skirting of vinylcork designs	2500 x 58 x 18 mm	96 0XX XX




Clip holder (30 pieces) for installing skirtings		96 196 00
--	--	-----------



Underlay cork rolls (density 180-200 Kg/m³)

Agglomerated cork roll with embedded exclusive Microban® antibacterial protection	10 m x 1 m x 2 mm	92 201 12
	30 m x 1 m x 2 mm	92 201 32
	20 m x 1 m x 3 mm	92 201 23
	15 m x 1 m x 4 mm	92 201 14
	12 m x 1 m x 5 mm	92 201 15
	10 m x 1 m x 6 mm	92 201 16



Cork sheets (density 240 Kg/m³)


Agglomerated cork, facing grade, sanded	915 x 610 x 6 mm	92 004 06
Agglomerated cork, facing grade, sanded	915 x 610 x 8 mm	92 004 08
Agglomerated cork, insulating/underlay	915 x 610 x 2 mm	92 015 02
Agglomerated cork, insulating/underlay	915 x 610 x 4 mm	92 015 04



Solid agglomerated cork skirtings



Self adhesive strip skirtings (click system)

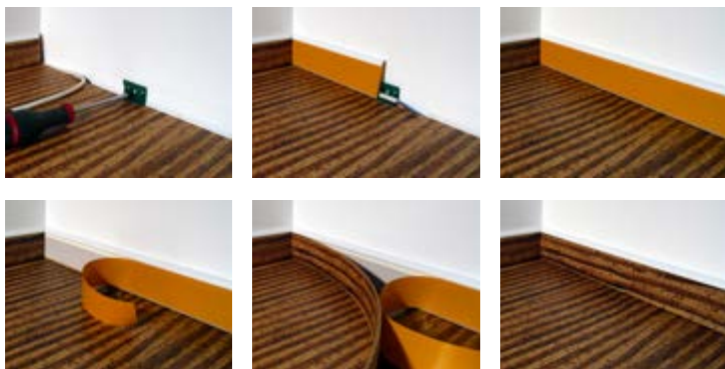


Digital printed skirtings (click system)






emotions

- 1 • WEARTOP-ARMOUR HPC super matt finish with anti-slip effect
- 2 • High-density natural cork surface 3 mm thickness
- 3 • Moisture resistant, high-density fibreboard (880kg/m<sup>3</sup>) 6 mm thickness
- 4 • All around JointShield® edge sealing system
- 5 • Integrated cork underlay 1,5 mm thickness with Microban® antibacterial protection




studio

- 1 • High performance PUR HotCoating® finished with 2 component waterborne top lacquer
- 2 • High-density natural cork surface, 3 mm thickness
- 3 • Moisture resistant, high-density fibreboard (880kg/m<sup>3</sup>) 6 mm thickness
- 4 • All around JointShield® edge sealing system
- 5 • Integrated cork underlay 1,5 mm thickness with Microban® antibacterial protection




bloom

- 1 • WEARTOP-ARMOUR HPC super matt finish with anti-slip effect
- 2 • High-density natural cork surface 3 mm thickness
- 3 • Moisture resistant, high-density fibreboard (880kg/m<sup>3</sup>) 6 mm thickness
- 4 • All around JointShield® edge sealing system
- 5 • Integrated cork underlay 1,5 mm thickness with Microban® antibacterial protection




ambient

- 1 • Hard-oil finish
- 2 • High-density natural cork surface 3 mm thickness
- 3 • Moisture resistant, high-density fibreboard (880kg/m<sup>3</sup>) 6 mm thickness
- 4 • All around JointShield® edge sealing system
- 5 • Integrated cork underlay 1,5 mm thickness with Microban® antibacterial protection



recolour

- 1 • High-quality AQUA2K+ 2 component waterborne finish
- 2 • High-density natural cork surface 3 mm thickness
- 3 • Micro-bevelled edges
- 4 • Moisture resistant, high-density fibreboard (880kg/m<sup>3</sup>) 6 mm thickness
- 5 • All around JointShield® edge sealing system
- 6 • Integrated cork underlay 1,5 mm thickness with Microban® antibacterial protection




vita

- 1 • High performance PUR HotCoating® finished with 2 component waterborne top lacquer
- 2 • High Definition Digital Printing
- 3 • High-density natural cork surface, 3 mm thickness
- 4 • Micro-bevelled edges
- 5 • Moisture resistant, high-density fibreboard (880kg/m<sup>3</sup>) 9 mm thickness
- 6 • Integrated cork underlay 1,5 mm thickness with Microban® antibacterial protection
- 7 • High-density natural cork, 4 mm thickness




corium

- 1 • High-quality AQUA2K+ 2 component waterborne finish
- 2 • Genuine recycled leather 2 mm thickness
- 3 • Micro-bevelled edges
- 4 • Agglomerated cork sound insulation, 1 mm thickness
- 5 • Moisture resistant, high-density fibreboard (880kg/m<sup>3</sup>) 6 mm thickness
- 6 • Integrated cork underlay 1,5 mm thickness with Microban® antibacterial protection
- 7 • High-density agglomerated cork, 2 mm thickness




heritage

- 1 • High performance PUR HotCoating® finished with 2 component waterborne top lacquer
- 2 • Real wood veneer, 0,6 mm thickness
- 3 • Micro-beveled edges
- 4 • High-density agglomerated cork layer, 2,2 mm thickness
- 5 • Moisture resistant, high-density fibreboard (880kg/m<sup>3</sup>) 6 mm thickness
- 6 • Counter balance wood sheet 0,5 mm thickness
- 7 • Integrated cork underlay 1,2 mm thickness with Microban® antibacterial protection




vinylcork

- 1 • Luxury vinyl 2mm thickness 0,3 or 0,5 mm (vinylcorkPRO) wear layer
- 2 • Agglomerated cork sound insulation, 1mm thickness
- 3 • Moisture resistant, high-density fibreboard (880kg/m<sup>3</sup>) 6 mm thickness
- 4 • All around JointShield® edge sealing system
- 5 • Integrated cork underlay 1,5 mm thickness with Microban® antibacterial protection



linocork

- 1 • Linoleum layer 2 mm thickness
- 2 • Agglomerated cork sound insulation 1 mm thickness
- 3 • Moisture resistant, high-density fibreboard (880kg/m<sup>3</sup>) 6 mm thickness
- 4 • All around JointShield® edge sealing system
- 5 • Integrated cork underlay 1,5 mm thickness with Microban® antibacterial protection




tradition

- 1 • Cork veneer
- 2 • High-density agglomerated cork backing



decodalle

- 1 • Wax coating
- 2 • Cork veneer
- 3 • Agglomerated cork backing



			emotions	studio	bloom	ambient	recolour	vita	corium	vinylcork	linocork	heritage	tradition	decodalle		
Level of use	Standard	Unit														
Residential	EN 685	Class													--	
Commercial	EN 685	Class				--									--	
Finish			WEARTOP	HCA2K	WEARTOP	HARDOIL	AQUA2K+	HCA2K	AQUA2K+	MICRO CERAMIC		HCA2K		PARAWAX		
General Properties	Standard	Unit														
Dimensions	EN 427	mm	910 x 300	910 x 300 1164 x 194 388 x 388	910 x 300	910 x 300	610 x 380	1746 x 194	900 x 150	1164 x 194 388 x 388	600 x 450	1164 x 194 910 x 300	910 x 300 388 x 388	1164 x 194	600 x 300 300 x 300 600 x 450	600 x 300
Thickness	EN 428	mm	10,5	10,5	10,5	10,5	10,5	13,5	4	10,5	4	10,5	10,5	10,5	4	3
Squareness	EN 427	mm	< 0,3	< 0,3	< 0,3	< 0,3	< 0,3	< 0,3	< 0,3	< 0,3	< 0,3	< 0,3	< 0,3	< 0,3	< 0,3	< 0,4
Straightness	EN 427	mm	< 0,2	< 0,2	< 0,2	< 0,2	< 0,2	< 0,2	< 0,2	< 0,2	< 0,2	< 0,2	< 0,2	< 0,2	< 0,2	< 0,25
Apparent density	EN 672	Kg/m <sup>3</sup>	750	750	750	750	750	760	600	820	880	910	850	780	500	≥ 220
Mass per unit area	EN 430	g/m <sup>2</sup>	7900	7900	7900	7900	7900	10200	2400	8600	3500	9600	8900	8200	2000	700
Flatness of the panel	EN 14085	%	< 0,1 / 0,5	< 0,1 / 0,5	< 0,1 / 0,5	< 0,1 / 0,5	< 0,1 / 0,5	< 0,1 / 0,5	--	< 0,1 / 0,5	--	< 0,1 / 0,5	< 0,1 / 0,5	< 0,1 / 0,5	--	--
Length concave/convex		%	< 0,05 / 0,1	< 0,05 / 0,1	< 0,05 / 0,1	< 0,05 / 0,1	< 0,05 / 0,1	< 0,05 / 0,1	--	< 0,05 / 0,1	--	< 0,05 / 0,1	< 0,05 / 0,1	< 0,05 / 0,1	--	--
Width concave/convex		%	< 0,05 / 0,1	< 0,05 / 0,1	< 0,05 / 0,1	< 0,05 / 0,1	< 0,05 / 0,1	< 0,05 / 0,1	--	< 0,05 / 0,1	--	< 0,05 / 0,1	< 0,05 / 0,1	< 0,05 / 0,1	--	--
Opening between panels	EN 14085	mm	< 0,1	< 0,1	< 0,1	< 0,1	< 0,1	< 0,1	--	< 0,1	--	< 0,1	< 0,1	< 0,1	--	--
Height difference between panels	EN 14085	mm	< 0,15	< 0,15	< 0,15	< 0,15	< 0,15	< 0,15	--	< 0,15	--	< 0,15	< 0,15	< 0,15	--	--
Residual indentation	EN 433	mm	< 0,25	< 0,25	< 0,25	< 0,25	< 0,25	< 0,25	< 0,25	< 0,25	< 0,25	< 0,25	< 0,25	< 0,25	< 0,25	--
Dimensional stability	EN 669 / EN 434	%	< 0,2	< 0,2	< 0,2	< 0,2	< 0,2	< 0,2	< 0,4	< 0,2	< 0,2	< 0,2	< 0,2	< 0,2	< 0,4	< 0,4
Safety Properties	Standard	Unit														
Reaction to fire	EN 13501-1	Class	D <sub>s</sub> -S1	D <sub>s</sub> -S1	D <sub>s</sub> -S1	D <sub>s</sub> -S1	D <sub>s</sub> -S1	D <sub>s</sub> -S1	D <sub>s</sub> -S1	D <sub>s</sub> -S1	D <sub>s</sub> -S1	B <sub>s</sub> -S1	D <sub>s</sub> -S1	C <sub>s</sub> -S1	C <sub>s</sub> -S1	--
Formaldehyde emission	EN 717-1/2	Class	E1	E1	E1	E1	E1	E1	E1	E1	E1	E1	E1	E1	--	--
Slip resistance	EN 14041	Class	DS	DS	DS	DS	DS	DS	DS	DS	DS	DS	DS	DS	DS	--
Sliding coefficient	EN 13893	Coeff.	> 0,7	> 0,7	> 0,7	> 0,7	> 0,7	> 0,7	> 0,7	> 0,7	> 0,7	> 0,7	> 0,7	> 0,7	> 0,7	--
Additional Properties	Standard	Unit														
Thermal resistance	EN 12667	m <sup>2</sup> .K/W	0,114	0,114	0,114	0,114	0,114	0,130	0,062	0,099	0,050	0,112	0,110	0,101	0,062	0,055
Thermal conductivity	EN 12667	W/m.K	0,092	0,092	0,092	0,092	0,092	0,100	0,065	0,106	0,080	0,094	0,095	0,104	0,065	0,055
Impact noise reduction	ISO 140-8	dB	18	18	18	18	18	18	17	17	17	17	17	17	18	--
Wear resistance	EN 14354	Nr. Cycles	> 7000	> 7000	> 7000	> 1000	> 5000	> 7000	> 7000	> 5000	> 4000	--	--	> 7000	--	--
Scratch resistance	EN 438	N	2,0	2,0	2,0	2,0	2,0	2,0	2,0	2,0	2,0	--	--	2,0	--	--
Impact resistance (small ball)	EN 438	N	> 40	> 40	> 40	> 40	> 40	> 40	> 40	> 40	> 40	--	--	> 40	--	--
Static electrical charge	EN 1815	kV	< 2,0 (antistatic)	< 2,0 (antistatic)	< 2,0 (antistatic)	< 2,0 (antistatic)	< 2,0 (antistatic)	< 2,0 (antistatic)	< 2,0 (antistatic)	< 2,0 (antistatic)	< 2,0 (antistatic)	< 2,0 (antistatic)	< 2,0 (antistatic)	< 2,0 (antistatic)	< 2,0 (antistatic)	--



All GRANORTE floors are easy to maintain. However, as any kind of floor, it requires continuous and proper cleaning and care so that the surface protection and the attractive appearance of the floor are maintained.

#### Preventive care

The floor must be kept clean. Never use cleaning products with abrasive ingredients or solvent based.

Furniture legs should have protective pads to avoid scratches. Furniture and other heavy objects must be placed carefully.

A doormat should be laid inside the front door to help protect against dirt and sand.

Chair castors should be of type W (soft). For additional protection, polycarbonate mats under castor chairs should be used.

Avoid sharp or pointed objects with concentrated weight such as high heels on your cork floor.

Prolonged contact of plasticizer-containing material (e.g. rubber, latex, plastics...) with the varnish may cause non-reversible stain of the floor.

Cork is a natural product and may tend to fade when exposed to sunlight over long periods of time. Use blinds or curtains to prevent cork fading by direct solar radiation.

#### Cleaning

GRANORTE floorings must be cleaned regularly with a mop, hair broom or vacuum cleaner. Dust and dirt behave like sanding paper and are thus to be removed immediately. If necessary (heavier soiling) the floor can be damp-mopped using an appropriate cleaning product.

#### Maintenance

Maintenance caring can become necessary from time to time to refresh the protective layer. First clean your floor and then apply a thin layer of a recommended maintenance product.

Please observe the particular maintenance instruction for your floor. For the correct use follow the instructions on the packaging labels of each product, as well as the information from technical data sheets.

#### Attention

GRANORTE floorings are made with high quality, natural materials and should be handled accordingly. In spite of all due care given during manufacturing, there will be variations in appearance (colour, gloss, and texture). This should be verified before laying the floor, distributing the tiles/planks in a way that variations are not striking.

Cork (as wood) may change colour when exposed to sunlight over long periods of time.

Although every effort has been made to ensure accuracy during the production of this catalogue, GRANORTE disclaims potential product changes and possible print errors. The product photos may not accurately match the real colour and texture of the finished product.



# GRANORTE®

delivering nature

GRANORTE - Revestimentos de Cortiça, Lda. | Avenida de Santiago, 68 | 4520-470 RIO MEÃO | PORTUGAL  
Tel.: + 351 256783026 | Fax: + 351 256781562 | [info@granorte.pt](mailto:info@granorte.pt) | [www.granorte.pt](http://www.granorte.pt)

GRANORTE GmbH DEUTSCHLAND | Kilianstraße 142 | 90425 Nürnberg | GERMANY  
Tel.: +49 091137660170 | Fax: +49 091137660720 | [info@granorte.de](mailto:info@granorte.de) | [www.granorte.de](http://www.granorte.de)

GRANORTE UK LTD | Unit 29 - Littleton Business Park - Littleton Drive | Huntington - Cannock WS12 4TR | UK  
Tel: +44 1785711131 | Fax: +44 1785711141 | [info@granorte.co.uk](mailto:info@granorte.co.uk) | [www.granorte.co.uk](http://www.granorte.co.uk)

